



ALVICARB S

Static compact
activated carbon unit



VENTILATION OF PROFESSIONAL KITCHENS, A SPECIALIST AFFAIR.

ALVICARB S

DESIGN / MANUFACTURE

Stainless steel casing with front access door.


The ALVICARB-S unit has **three filtering levels**:

- **A synthetic filter:** G4 (95% gravimetric). Galvanised steel frame with synthetic medium held in place by a galvanised steel mesh. Thickness 48mm. Slide fitting.
- **A high efficiency filter:** F7 high efficiency filter (85% opacimetric), with polypropylene medium. Thickness 98mm. Fitted on a slide.

- **A set of activated carbon cartridges:** rechargeable Ø160 / length 400mm. Mounted on a galvanised steel plate, easy to recharge after saturation. Each cartridge is easy to remove using its quarter turn fixing. Maximum flow per cartridge: 280m³/h.

ALVICARB-S	Max flow (m ³ /h)	Synthetic / Compact filter		Activated carbon cartridge		
		H x W (mm)	Surface area (m ²)	Nb	Carbon weight (kg)	Surface area (m ²)
S05	1400	290 x 595	0.17	5	16	1
S09	2500	595 x 595	0.35	9	29	1.9

DIMENSIONS / WEIGHT

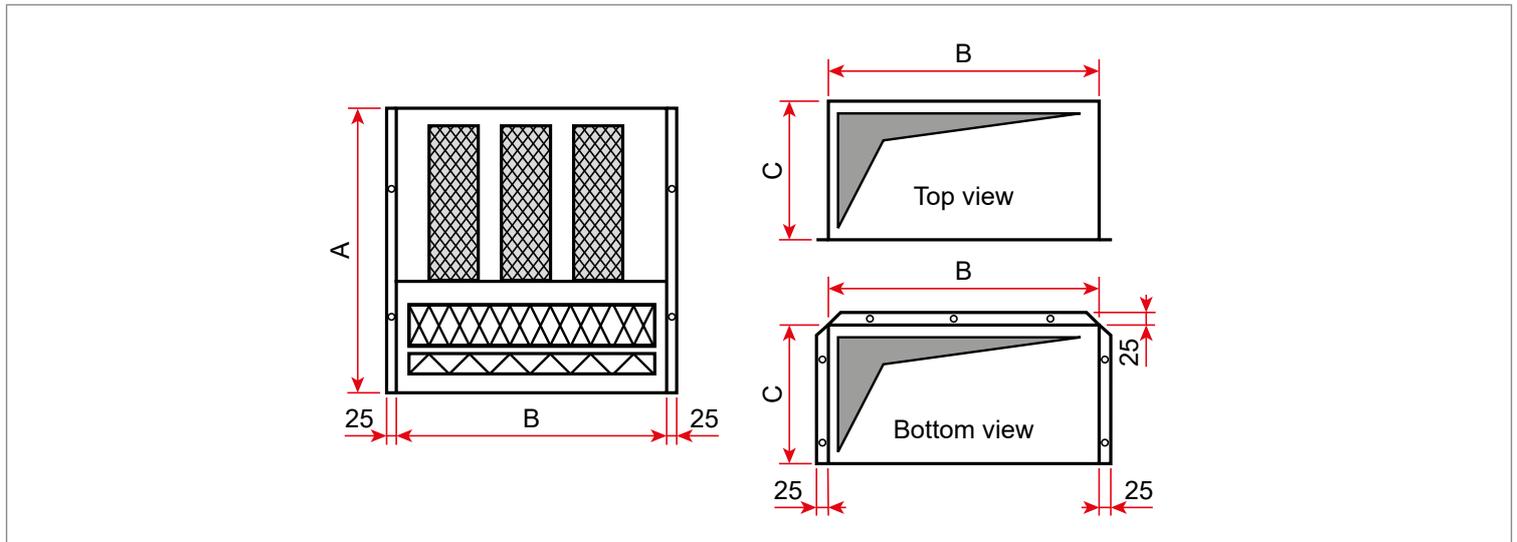

ALVICARB-S	A (mm)	B (mm)	C (mm)	Weight (kg)
S05	700	613	386	47
S09	700	613	611	71