





LUDILAV

Static hoods for laundry premises H=380mm



VENTILATION OF PROFESSIONAL KITCHENS, A SPECIALIST AFFAIR.

LUDILAV STATIC

DESIGN / MANUFACTURE

The LUDILAV range is single-block from 1000 to 2500mm (single block up to 3000mm available as an option).

Longer lengths are created by assembling single block units screwed together, with no visible fixings on the outer faces and in the extraction volume.

LUDILAV hoods are available at a height of 380 mm.

| There is a support profile built into each end of the single block unit, making it possible to suspend it from ØM8 threaded rods.

| The production method used, with folds on all visible parts, gives a finish that is free of burrs and protruding parts.

All visible parts and the back of the extractor are manufactured from AISI 304 austenitic stainless steel (CN 18-10), brushed finish on both sides, 220 grade with PVC protection.


The design of the ends avoids all markings on the outer faces. They are assembled using heat-welded pins and nuts.


LUDILAV S: Single extractor hood, condensation filters 398x498x25mm with stainless steel frame and handle, (flow of 1100m³/h per filter), stainless steel neutral plates 398x498x25mm.

LUDILAV D: Double extractor hood, condensation filters (flow of 1100m³/h per filter) and neutral plate on the front and back providing optimum efficiency for deep washing machines.

| Each single block unit is leak tight and fitted with a G3/8 stainless steel purge plug in its lower part to drain off grease and condensates.

DIMENSIONS / WEIGHT

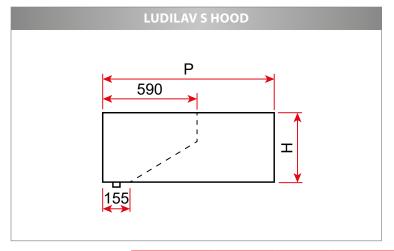

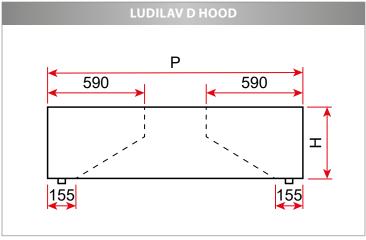



LUDILAV H=380 mm							
Model	09	11	13	15		17	
	S	S	S	S	D	S	D
H (mm)	380	380	380	380		380	
D (mm)	915	1120	1240	1445		1650	
Weight (kg/m)	32	37	42	45	51	48	54




LUDILAV STATIC

FIXING POINTS

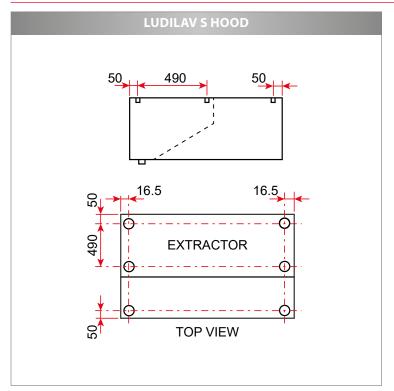

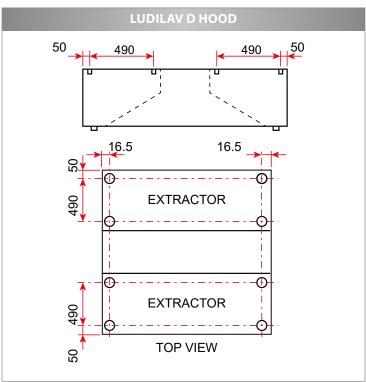

CONNECTIONS: Diameter and recommended number of hoops

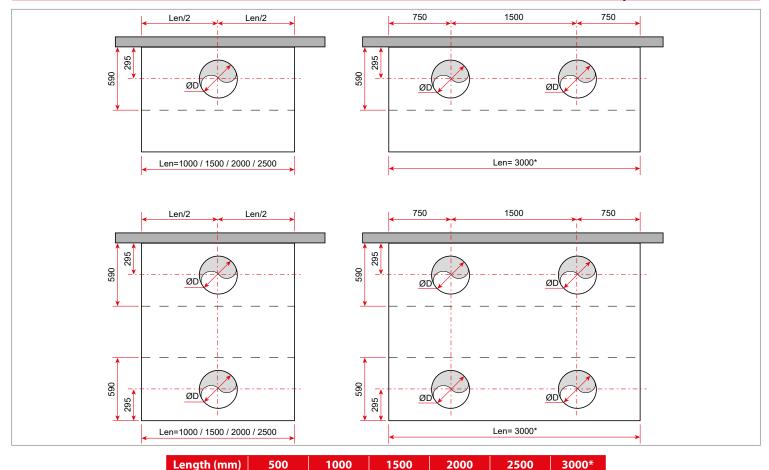

355

400

400

*: Length 3000 mm single block Drilling and connection hoops as an option

ØD (mm)

