



## **MODULINE 3**

Semi-professional dynamic hoods  
H=260mm



VENTILATION OF PROFESSIONAL KITCHENS, A SPECIALIST AFFAIR.

# MODULINE 3 DYNAMIC

## DESIGN / MANUFACTURE

The MODULINE 3 design is the direct result of our experience of product lines for "large kitchens". This semi-professional, single block hood, **is available in three 600, 900 and 1200 versions.**


**The different parts are assembled without any visible fixings.** Back fixing using 2 Ø9 holes (hardware not included) and crimped ØM6 nuts, make it possible to suspend it from threaded rods.

**All visible parts are manufactured from AISI 304 stainless steel**, brushed finish on both sides, 220 grade with PVC protection.

- **Mesh filters** 398x284x22mm with stainless steel frame and handle, galvanised medium or stainless steel 398x284x22mm **baffle filters**.
- **lighting from directional built in spots**, 35W, IP44, with front face control.
- **Connection hoop fitted.**
- External rotor **motor-fan** IP44, class B and an **electronic variable control built into the front face.**


MODULINE 3	No of filters	No of spots
600	2	2
900	3	2
1200	4	3

## DIMENSIONS / WEIGHT / FIXING POINTS

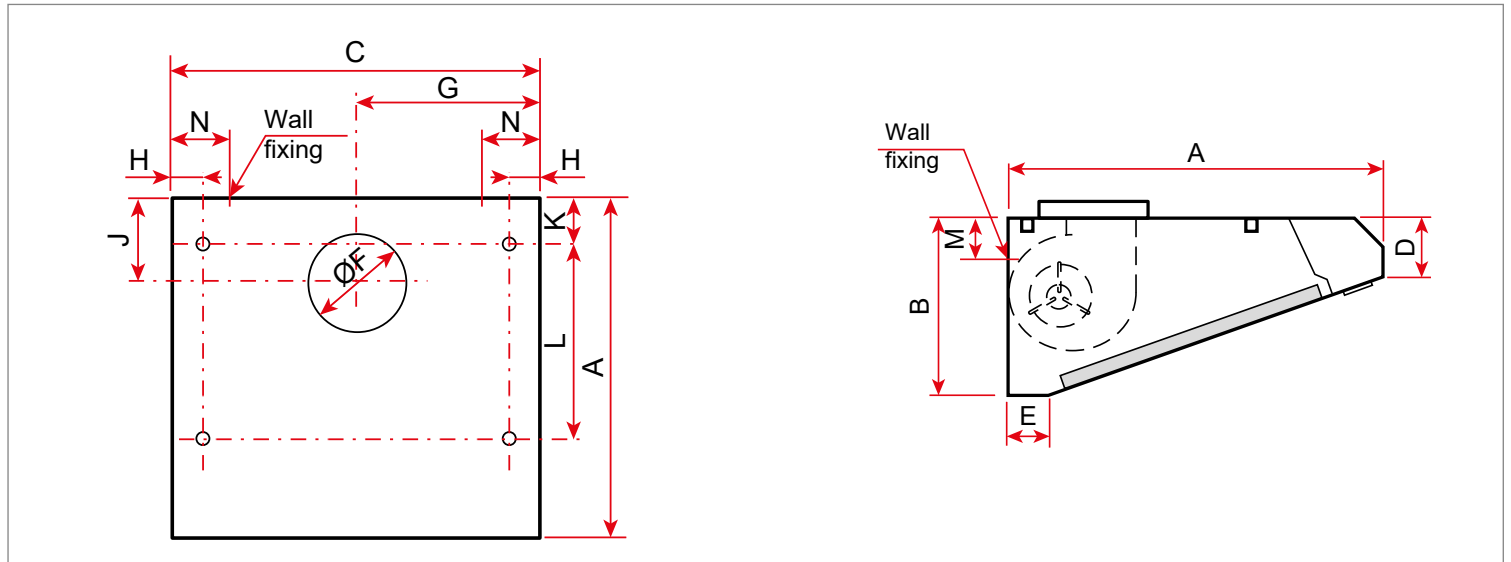

MODULINE 3	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	L (mm)	M (mm)	N (mm)	Weight (kg)
600	550	260	569	90	59	160	284.5	45	166	50	360	30	65	9
900	550	260	859	90	59	200	429.5	45	166	50	360	30	65	14
1200	550	260	1144	90	59	250	572	45	166	50	360	30	65	18

## SELECTION GRAPHS

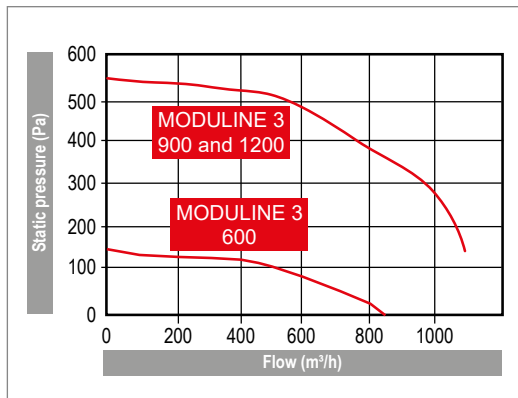

## ELECTRIC SPECIFICATIONS

ELECTRIC SPECIFICATIONS										Use Temperature (°C)	
MODULINE 3	Fan type	Voltage (V)	Rotation speed (Rpm)	Int. (A)	Power (W)	Freq. (Hz)	Class	IP	Cond. (mF)		
600	RE 080-4PM	Single phase 230	1050	0.44	100	50	B	44	2.5	-20/40	
900 / 1200	RE 080-2PM	Single phase 230	2602	1.7	380	50	B	44	8	-20/55	

