



OPALINE

Static Extractors / hoods
H=530mm



VENTILATION OF PROFESSIONAL KITCHENS, A SPECIALIST AFFAIR.

OPALINE STATIC

DESIGN / MANUFACTURE

The OPALINE range is single-block:

- from 1000 to 2500mm for wall mounted hoods (single block up to 3000mm possible as an option)
- from 1000 to 3000mm for central hoods.

Longer lengths are created by assembling single block units screwed together, with no visible fixings on the outer faces and in the extraction volume.

OPALINE hoods are available in two models:

OPALINE T:

extractor height 530 / front face height = 380mm

OPALINE R:

extractor height 530 / front face height = 380mm

There is a support profile built into each end of the single block unit, making it possible to suspend it from ØM8 threaded rods.

The production method used, with folds on all visible parts, gives a finish that is free of burrs and protruding parts.

All visible parts are manufactured from AISI 304 austenitic stainless steel (CN 18-10), brushed finish on both sides, 220 grade with PVC protection.




The design of the ends avoids all markings on the outer faces. They are assembled using heat-welded pins and nuts.

Mesh filters 398x498x25mm with stainless steel frame and handle, galvanised medium (flow of 1100m³/h per filter). **Optionally, full stainless steel filters** (flow of 1100m³/h per filter), **baffle filters** (flow of 600m³/h per filter) or **HE filter** (flow of 500m³/h). Stainless steel 398x498x25mm neutral plates.

Each single block unit is leak tight and fitted with a G3/8 stainless steel purge plug in its lower part to drain off grease and condensates.

The extractors and central hoods are composed of two back to back elements with a central separator, to be assembled together using the supplied hardware.


DIMENSIONS / WEIGHT

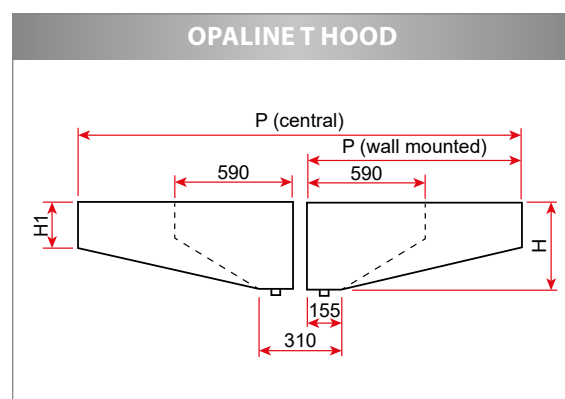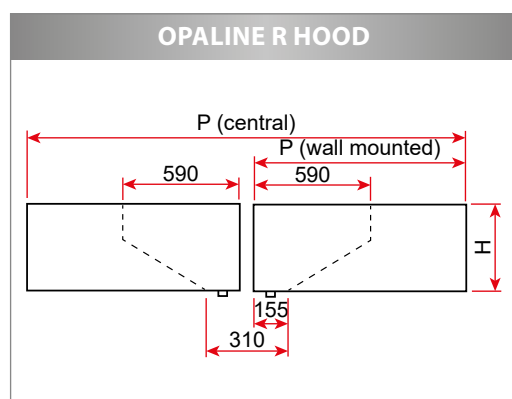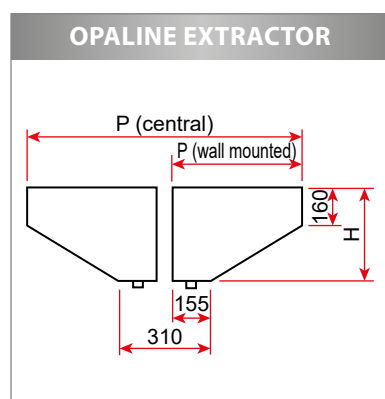

OPALINE H=530 mm											
H (mm)	530	530	530	530	530	530	530	530	530	530	530
H1 (mm)	-	-	380	-	380	-	380	-	380	-	380
Wall mounted											
Model	06	09		11		13		15		17	
		R	T	R	T	R	T	R	T	R	T
D (mm)	590	915		1120		1240		1445		1650	
Weight (kg/m)	32	38	37	45	44	52	51	55	54	57	56
Central											
Model	12	18		22		26		30		34	
		R	T	R	T	R	T	R	T	R	T
D (mm)	1180	1830		2240		2480		2890		3300	
Weight (kg/m)	64	76	74	90	88	104	102	110	108	114	112


OPALINE STATIC

FIXING POINTS

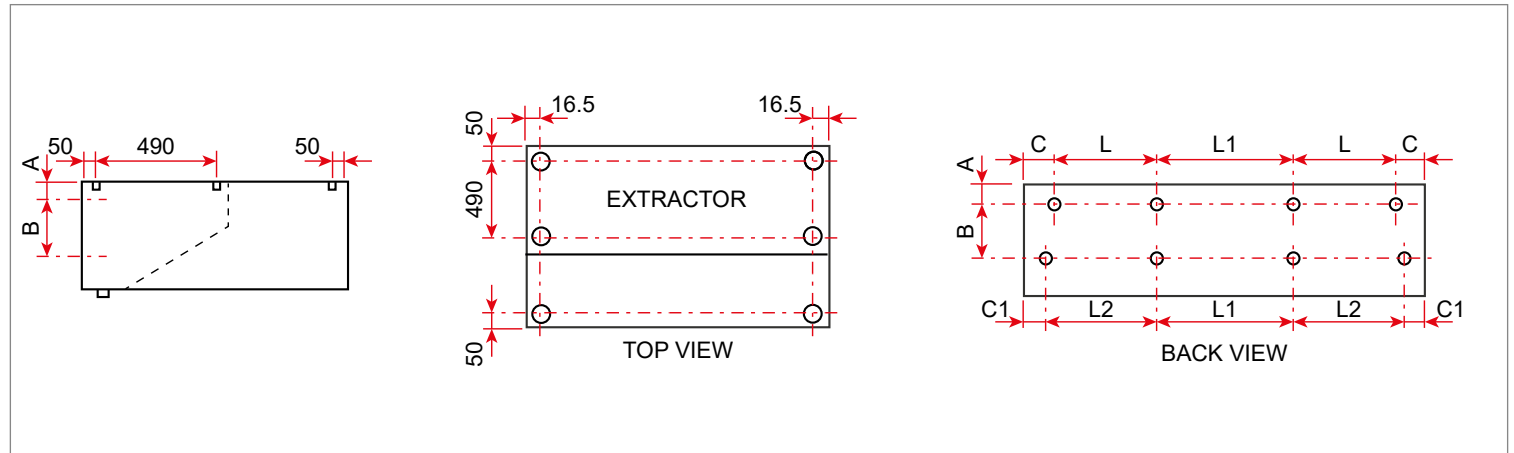

Length (mm)	OPALINE		C (mm)	C1 (mm)	L (mm)	L1 (mm)	L2 (mm)
	A (mm)	B (mm)					
500	30	468	51	32.5	-	-	-
1000					-	-	-
1500					699	-	715
2000					626	645	645
2500					793	811	811
3000					715	2x734	734

CONNECTIONS: Diameter and recommended number of hoops

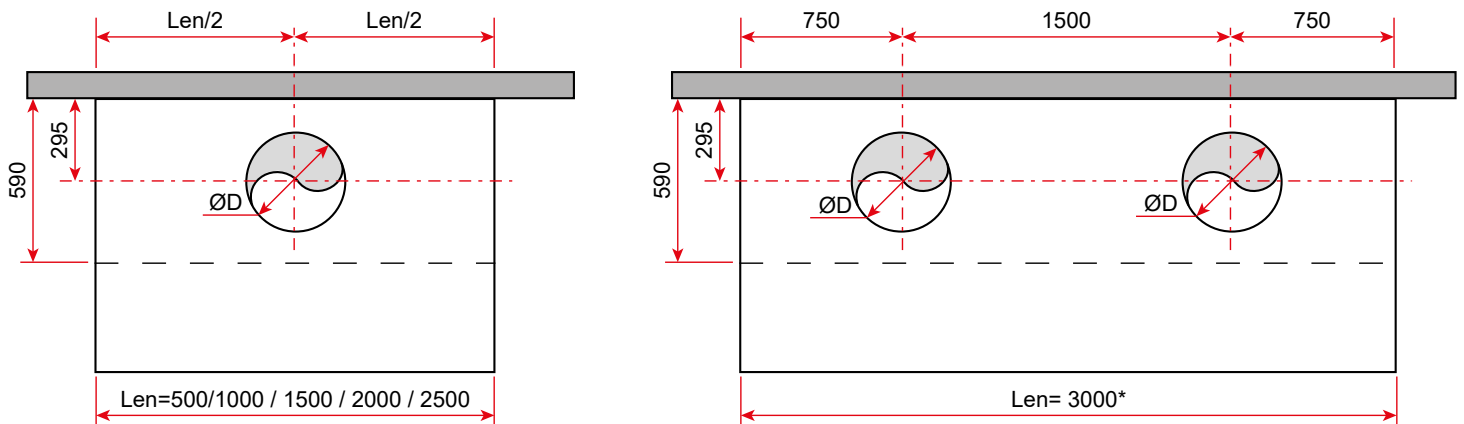

Length (mm)	500	1000	1500	2000	2500	3000*
$\varnothing D$ (mm)	315	315	355	400	400	355

*: Length 3000 mm single block
Drilling and connection hoops as an option