



# **DUOLINE**

Static central hoods  
H=380mm and 530mm



VENTILATION OF PROFESSIONAL KITCHENS, A SPECIALIST AFFAIR.

# DUOLINE STATIC

## DESIGN / MANUFACTURE

This line of **central hoods without an inner separator**, are designed to be installed over central, low width ranges.

**The DUOLINE range is single block** for lengths of 1000 – 1500 – 2000 – 2500mm and uses 2 1500 blocks for 3000mm lengths (3000mm single block available as an option).

**They have no visible fixings** on the outer faces and in the extractor volume.

**DUOLINE hoods are available in 2 heights:**

**DUOLINE 38:** height 380mm

**DUOLINE 53:** height 530mm

**There is a support profile**, built into each end of the single block unit, making it possible to suspend it from ØM8 threaded rods.

**The production method used, with folds on all visible parts**, gives a finish that is free of burrs and protruding parts.


**All visible parts are manufactured from AISI 304 austenitic stainless steel** (CN 18-10), brushed finish on both sides, 220 grade with PVC protection.

**The design of the ends** avoids all markings on the outer faces. They are assembled using heat-welded pins and nuts.

**Mesh filters** 398x498x25mm with stainless steel frame and handle, galvanised medium (flow of 1100m<sup>3</sup>/h per filter). **Optionally, full stainless steel filters** (flow of 1100m<sup>3</sup>/h per filter), **baffle filters** (flow of 600m<sup>3</sup>/h per filter) or **HE filter** (flow of 500 m<sup>3</sup>/h). Stainless steel 398x498x25mm neutral plates.

**Each single block unit is leak tight** and fitted with a G3/8 stainless steel purge plug in its lower part to drain off grease and condensates.

## DIMENSIONS / WEIGHT

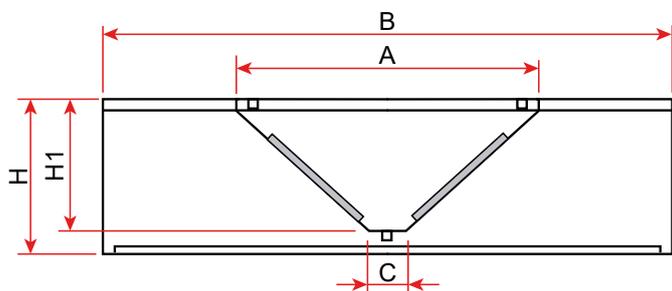


**DUOLINE 38**

Model	H (mm)	H1 (mm)	A (mm)	B (mm)	C (mm)	Weight (kg/m)
13	380	336	807	1240	100	50
15	380	336	807	1445	100	54

**DUOLINE 53**


Model	H (mm)	H1 (mm)	A (mm)	B (mm)	C (mm)	Weight (kg/m)
13	530	486	807	1240	100	60
15	530	486	807	1445	100	66

## FIXING POINTS

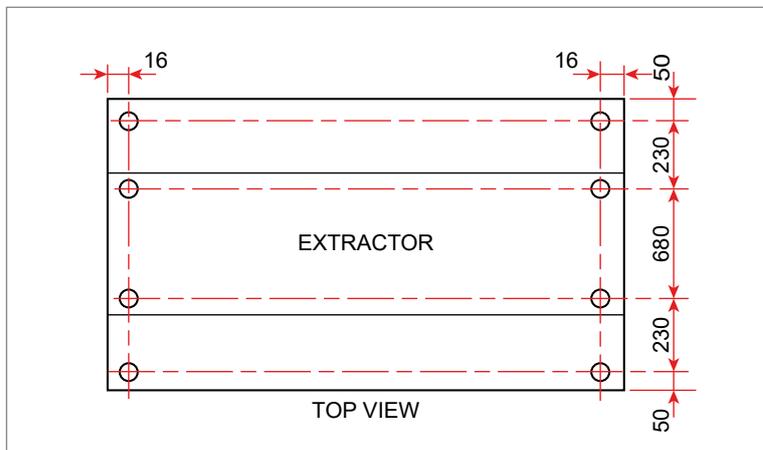

# DUOLINE STATIC

## CONNECTIONS: Diameter and recommended number of hoops

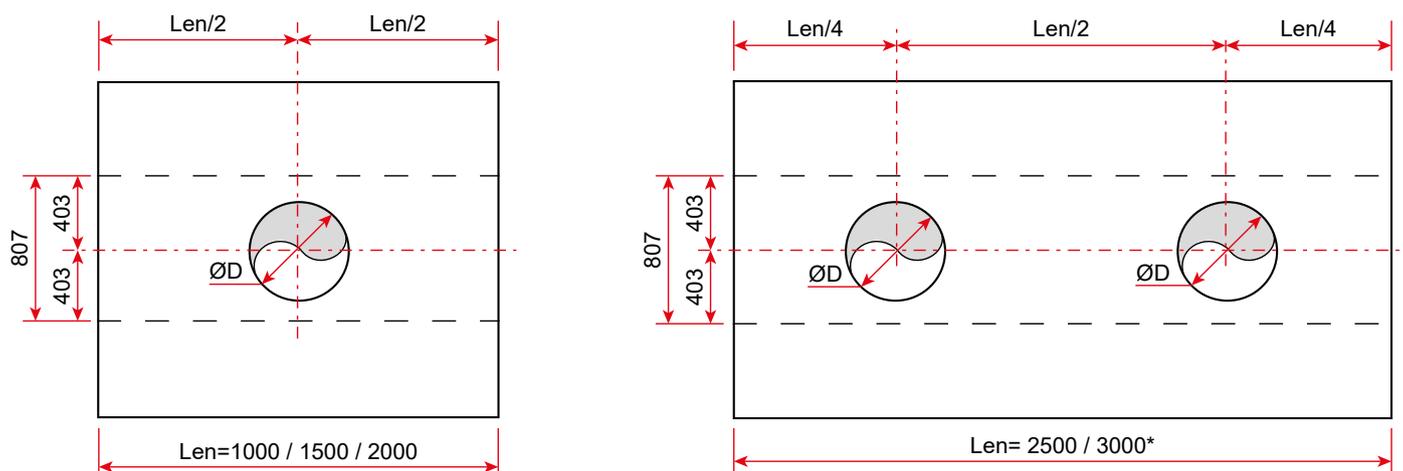

Length (mm)	1000	1500	2000	2500	3000*
ØD (mm)	315	355	400	400	355

\*: Length 3000 mm single block  
Drilling and connection hoops as an option

